


How To remove the Rear card from ORIGIN Keyboard

You need the First to apply Technote : **How To remove the Keybed from ORIGIN Keyboard**


Remove the 3 Screw bellow :



1/ On the other side use a 5:5 key to retain the nut when unscrew.

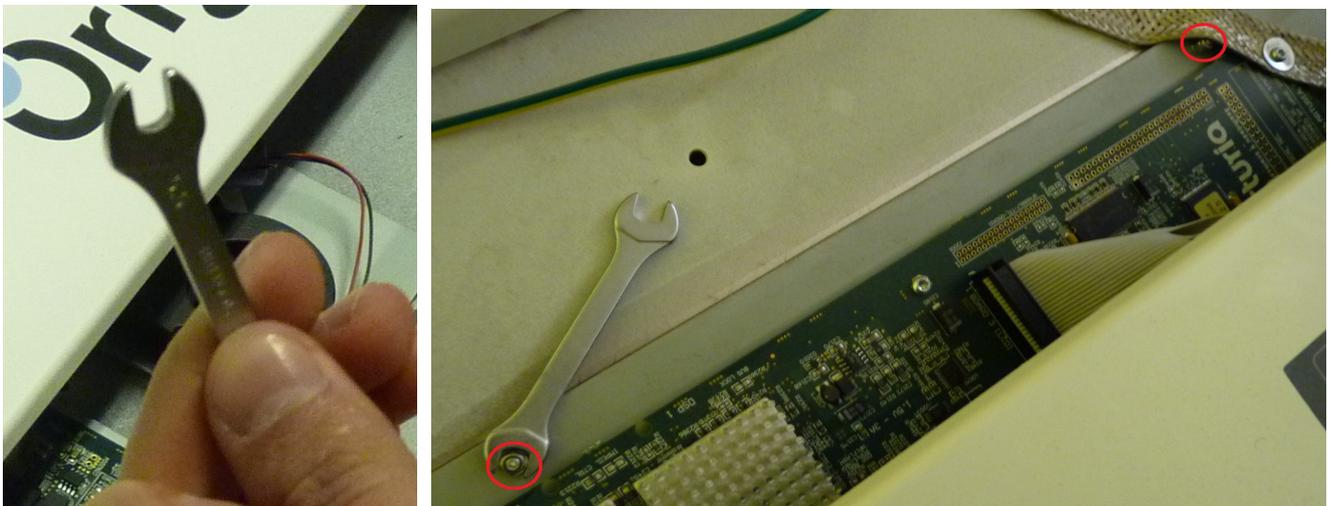

2/ Unscrew the 3 screws that retain the rear card on the metal plate by raising the unit.
In the same time hold it to keep it in balance.

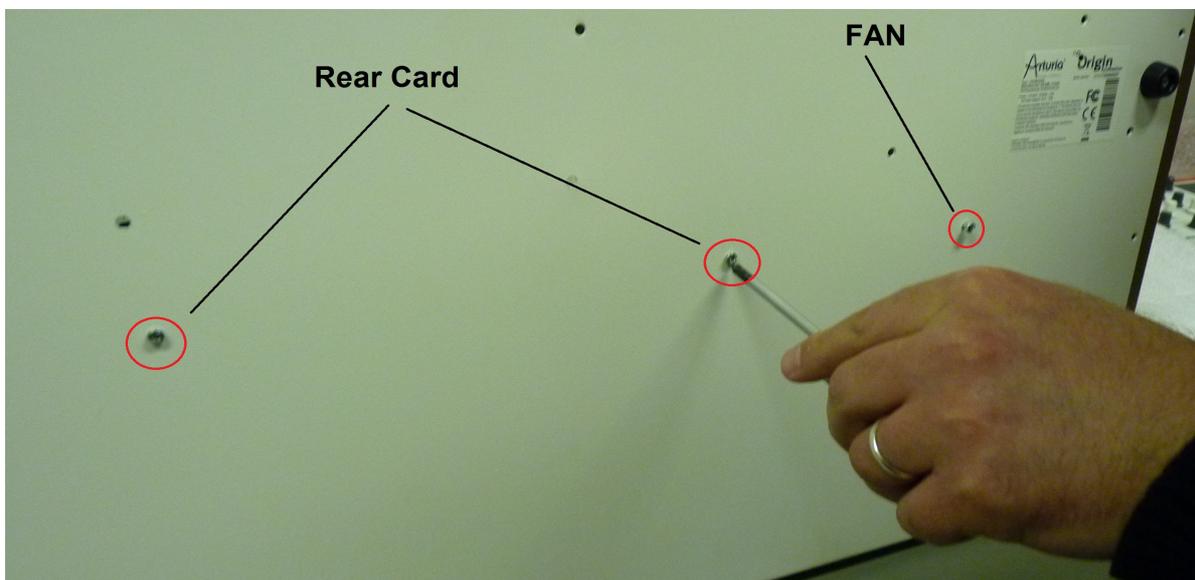

3/ You will need a screwdriver tip T10 format



a. Remove the last screw on the ribbon cable




b. Remove the four screw on the external sheet




4/ Unplug the cables following this order

a. Step 1,2,3

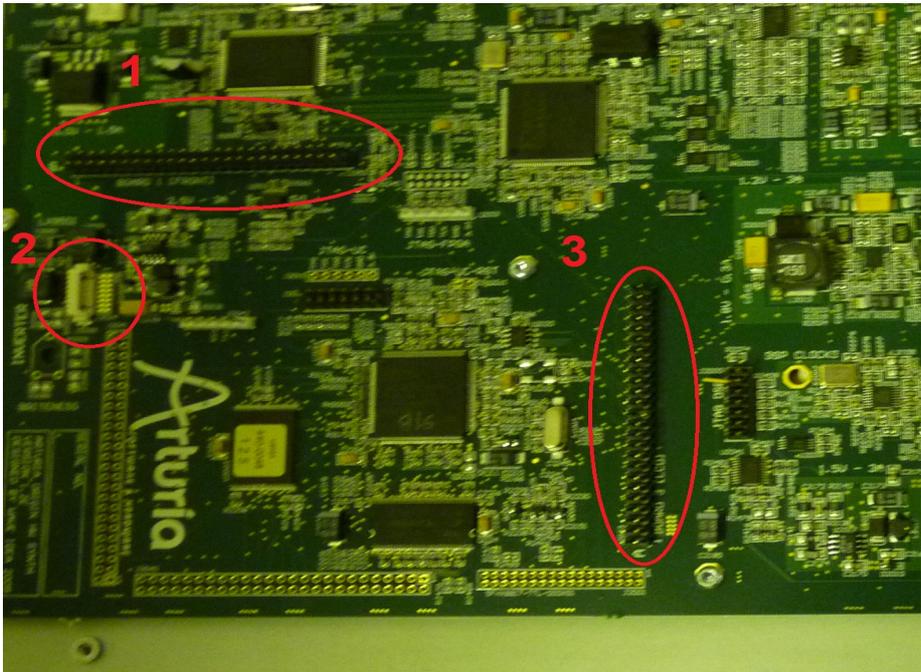

b. Remove the card by pulling the metal plate

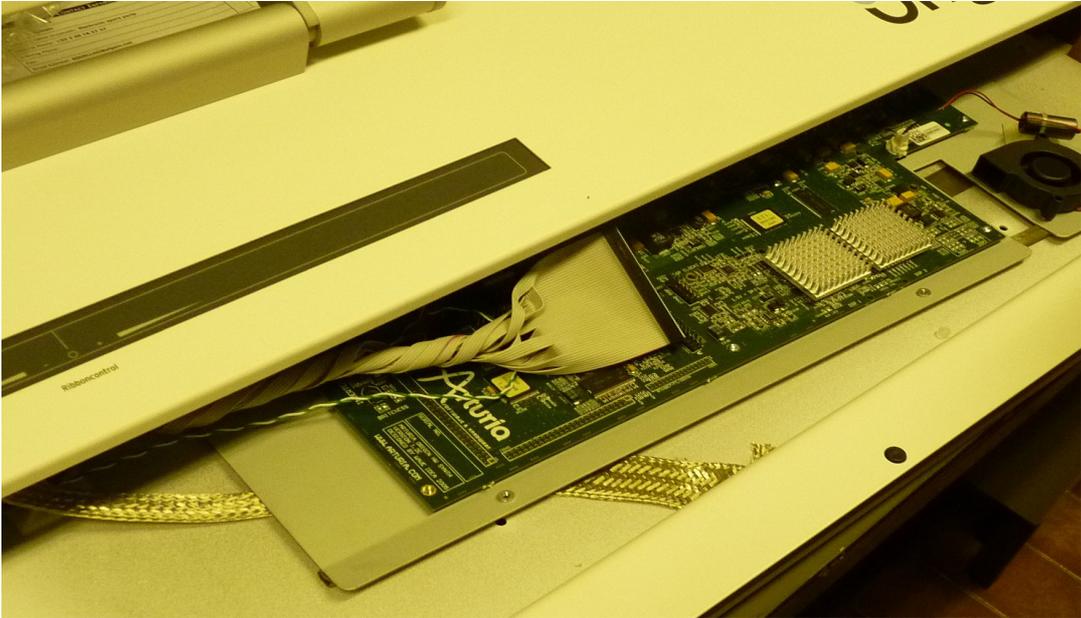

c. Step 4,5

